



Acoustic Ceiling Panel

Ecotone™

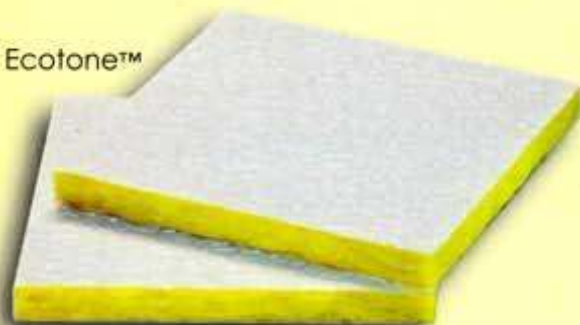

PVC Vinyl

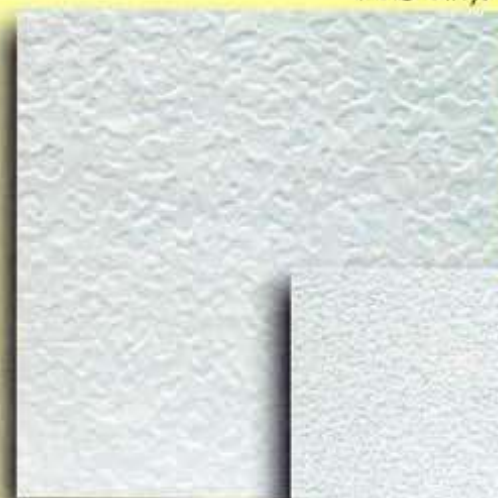

Printed Glass Tissue



Ecotone™

Light weight for quick and handling, cutting and installation. It can be easily cleaned with soft brush or vacuum. It is easy to assemble and remove when required, provides easy access to all installations above the ceiling. Ecotone is the most economic ways to provide excellent acoustical and thermal performance.

Polytone 200



Classictone™ 700



Polytone 200

Reduces the noise level of the environment, prevents echoing, absorbs noise and makes the speech and conversation clear and audible.

Classictone™ 700

With a well-designed ceiling finishes, it offers the best qualities of fibre glasswool insulation with excellent acoustical performance, highly efficient and cost effective.

Product	Acoustic Performance	Thermal Performance	Size	RH	Surface	Light reflectance
Ecotone™	NRC 0.50	K-value-0.0324 W/mk R-value-0.46m²K/W	15mm x 603mm x 1212mm 15mm x 595mm x 1195mm 15mm x 595mm x 595mm 15mm x 603mm 603mm	<80%	Fire retardant PVC vinyl	Minimum 0.85
Polytone 200	NRC 0.62	K-value-0.0332 W/mk R-value-0.46m²K/W	15mm x 603mm x 1212mm 15mm x 603mm 603mm	<80%	Fire retardant PVC vinyl	Minimum 0.85
Classictone™ 700	NRC 0.90	K-value-0.033 W/mk R-value-0.62m²K/W	20mm x 603mm x 1212mm(80kg/m³) 20mm x 595mm x 1195mm(80kg/m³) 25mm x 1195mm x 1195mm(96kg/m³) 25mm x 1212mm x 1212mm(96kg/m³)	<80%	Fire retardant Printed Glass Tissue	-